

EAN: 4057304019180
static.hansa.com/55162131



- Bath tub & Shower
- Thermostatic
- Wall mounted
- Chrome
- Fixed spout
- Standard aerator
- Temperature control handle, Flow control handle
- Turn operated diverter, Integrated into flow control handle
- Hand shower, Shower rail, Shower hose (1500 mm), Eco flow control
- Normal - Even and soft water stream, Refreshing - Strong water stream, activates and refreshes body, Relaxing - Soft water stream, pleasant for entire body
- The housing of the fittings conducts minimal heat, Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control, Litter filter(s), Ceramic head part for flow control
- Eccentric coupling(s)
- protected against back-flow in domestic use (according to DIN EN 1717)
- 3 spray functions

Technical data

Flow properties


Eco-flow at 3 bar	9.6 l/min
Flow-rate at 3 bar	20.4 / 11.4 l/min




Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +65°C
Working pressure	1-10 bar
Connection size	G1/2
Installation width	cc150 ± 15 mm
Projection	160 mm
Backflow prevention (EN1717)	EB
Material	Brass/Plastic

Regulations

EN standard	EN 1111
Noise class	II (ISO 3822)

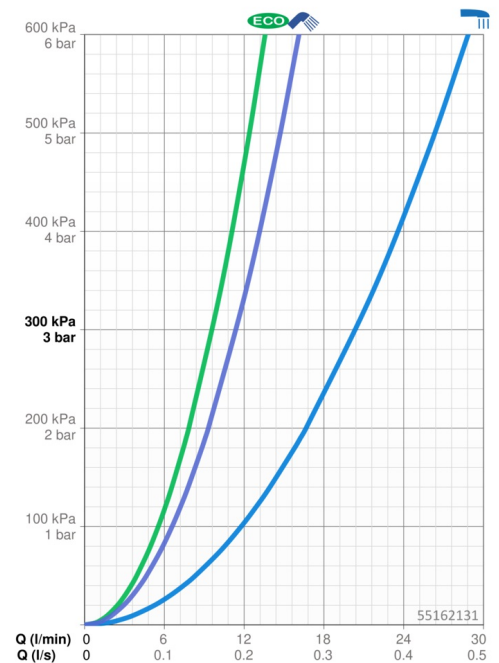

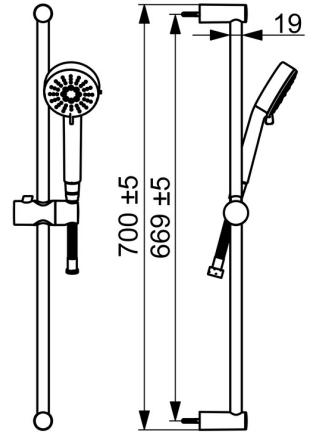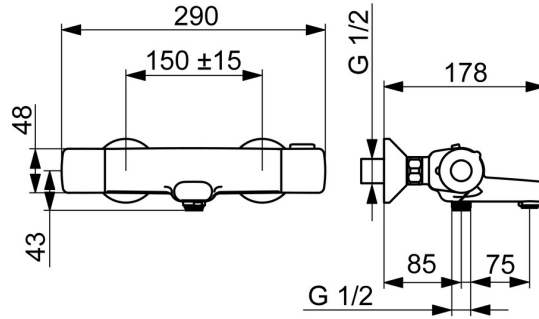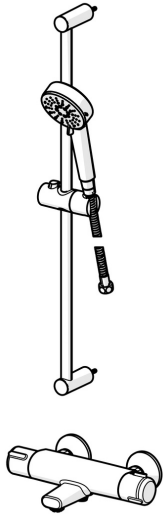

Spare parts

SP55162131

Name

Code