

Milos SoftClose

MODEL IMAGES



FEATURES

Art.No. 520276

- Urea 131.5 Duroplast
- SoftClose & TakeOff
- Oval
- Semi Wrapover
- round front
- evenly
- Lid buffer (DP97) white, 2 piece
- Seat buffer (SP15) white, 2 piece
- 2,28 kg

COLOUR


- white
- Colour code: 101

SOFT  CLOSE original


TAKE  OFF original

FAST  FIX

EX  CENTER



HINGE PICTURES

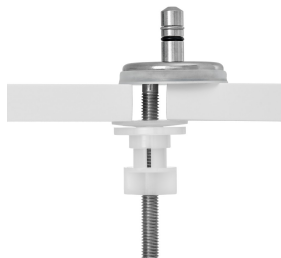

HINGE

- C0202Y
- 404146
- SoftClose (10mm Pin-20mm Dam.) / Stainless steel / Fast-Fix
- BottomFix
- Screw length: 75,0 mm
- Adjustments:
0,0 mm - 11,5 mm


ASSEMBLY INSTRUCTION



007

Milos SoftClose

Dimensioned drawing (mm)

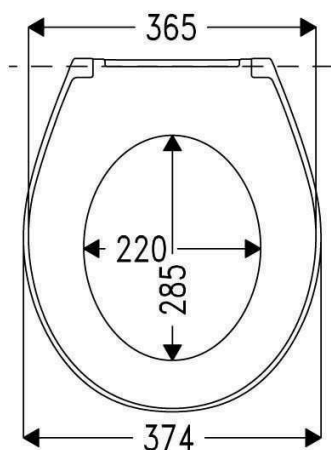


Various data

Gross weight: 2,89 kg

EAN Number: 4016959074173

Label:

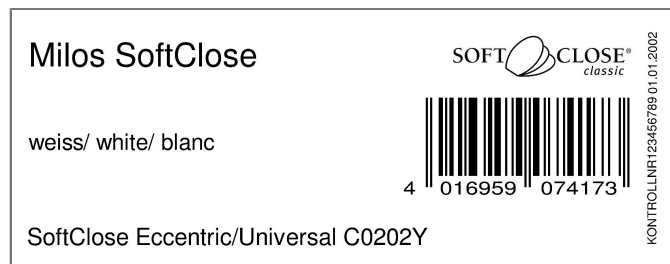

Packaging unit:



Inner box dimensions: 383x59x460 mm

CARE INSTRUCTIONS

This toilet seat was made of high quality and environmentally friendly materials with care and precision. If you follow a few simple cleaning instructions, you will enjoy this quality product for a long time. The closed, non-porous surface provides the best conditions for optimal hygiene. Do not use abrasive, chlorinated or acidic cleaning agents, as these can lead to discoloration, paint peeling or flash rust on the hinges. Neutral soap or mild and natural household detergents are best for thorough cleaning. After cleaning, wipe with a damp cloth. Leave the toilet seat and lid up as long as the flushing process continues or stronger cleaning agents are in the toilet bowl. Thank you for your attention and enjoy your new toilet seat.