


Uponor S-Press PLUS elbow 32-32

1070526

- Made of tin-plated DR brass

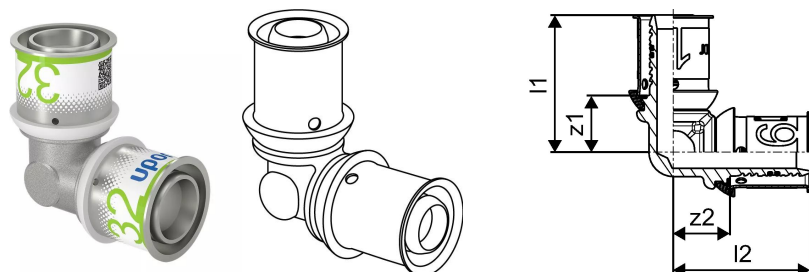

About Uponor S-Press PLUS elbow

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification



- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS elbow 32-32

1070526

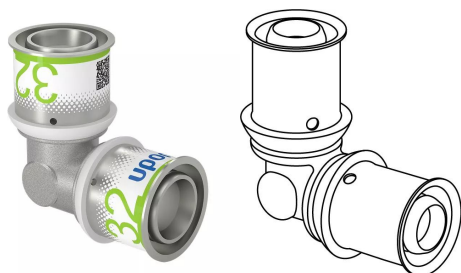

Technical data

Item no VVS	045470132
Item no NRF	5114453
Item (unit of measurement)	pce
Length (l1)	51 mm
Length (l2)	51 mm
z2	23 mm
Packaging Quantity PL1	5
Packaging Quantity PL3	20
Packaging Quantity PL4	960

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb