


## Uponor S-Press composite elbow PPSU 50-50

1046387

- Fast installation with easy bevel and without calibration
- Colour code

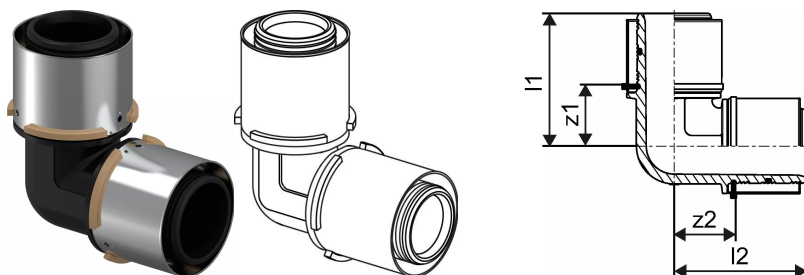

### Application information Uponor S-Press composite elbow PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press composite elbow PPSU 50-50

1046387

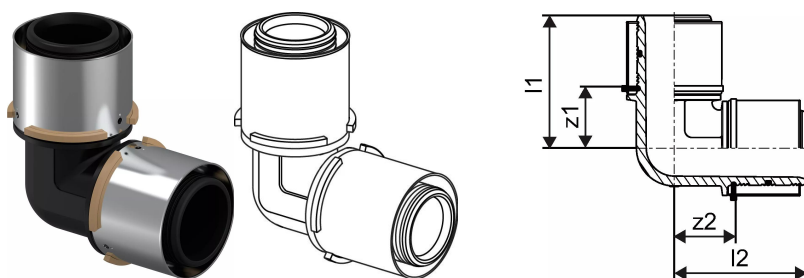

### Technical data

Item no VVS	087430150
Item no NRF	5071975
Item (unit of measurement)	Piece
Length (l1)	73 mm
Length (l2)	73 mm
Z-measurement z2	34 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	576

### Documents

Page with all documents

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com