


## Uponor S-Press coupling PPSU 40-40

**1046401**

- Fast installation with easy bevel and without calibration
- Colour code

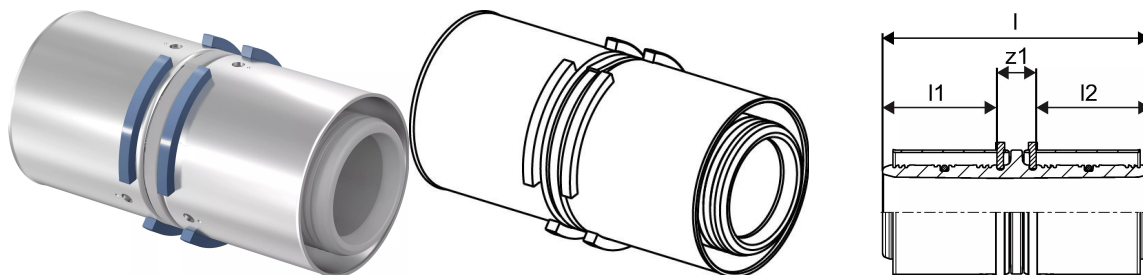

### Application information Uponor S-Press coupling PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press coupling PPSU 40-40

1046401

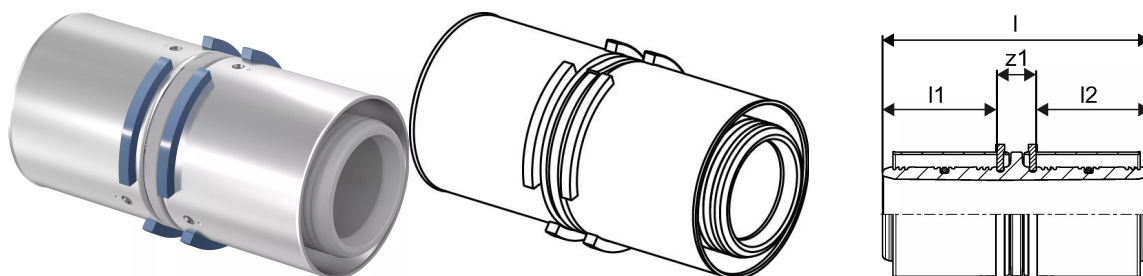

### Technical data

Item (unit of measurement)	pce
Item no VVS	087452140
Item no LVI	1722720
Item no NRF	5072016
Length (l1)	39 mm
Length (l2)	39 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	960

### Documents

Page with all documents

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211  
E info@uponor.com  
F +358 (0)20 129 2841

www.uponor.com