


Uponor S-Press tee female thread 40-Rp3/4"FT-40

1046923

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

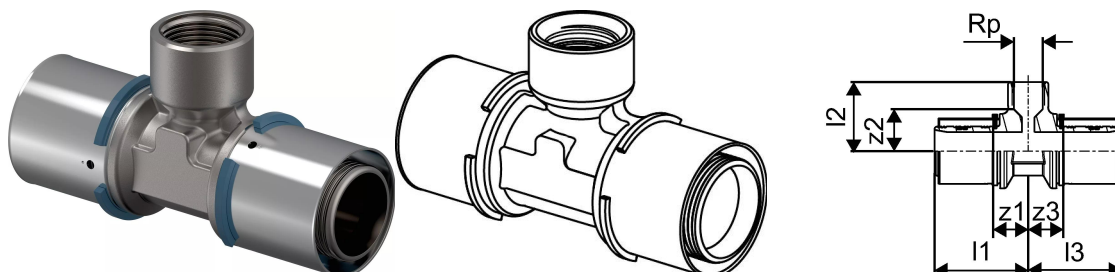

Application information Uponor S-Press tee female thread

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee female thread 40-Rp3/4"FT-40

1046923

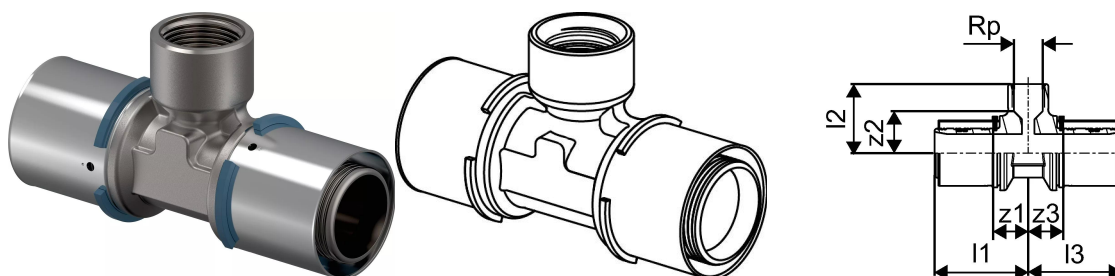

Technical data

Item (unit of measurement)	pce
Item no VVS	045478414
Female thread Rp	3/4 inch
Length (l1)	64 mm
Length (l2)	47 mm
Length (l3)	64 mm
Z-measurement z2	31 mm
Z-measurement z3	26 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	400

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com