


Uponor S-Press PLUS tee red. PPSU 25-16-16

1039953

- Fixed stainless steel sleeve

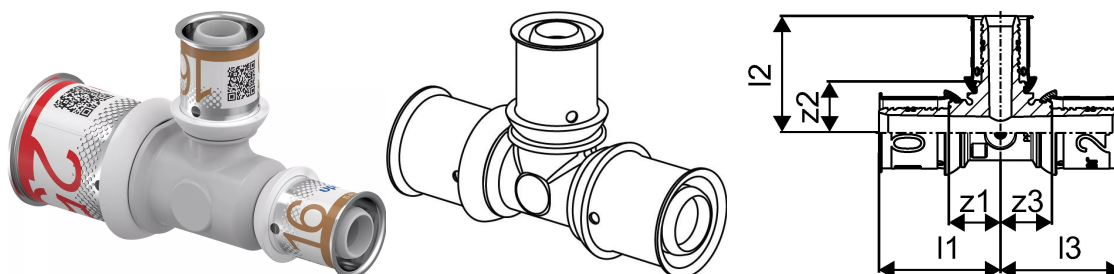

Application information Uponor S-Press PLUS tee red. PPSU

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS tee red. PPSU 25-16-16

1039953

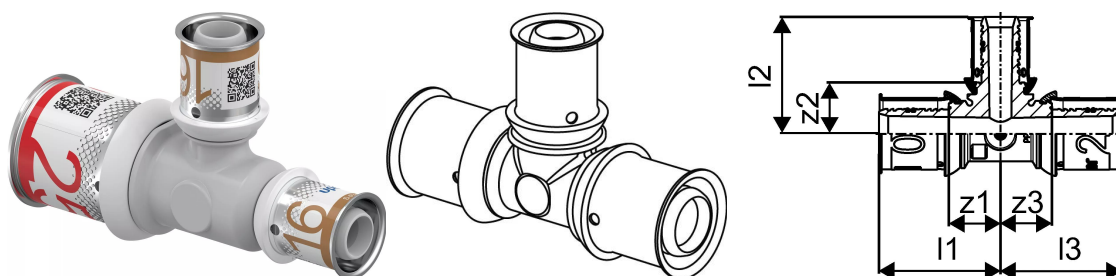

Technical data

Item (unit of measurement)	Piece
Item no VVS	087444122
Item no LVI	1720710
Item no NRF	5114407
Length (l1)	48 mm
Length (l2)	39 mm
Length (l3)	39 mm
Z-measurement z2	19 mm
Z-measurement z3	19 mm
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	1920

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211
E info@uponor.com
F +358 (0)20 129 2841

www.uponor.com