


## Uponor S-Press PLUS tee red. PPSU 32-25-25

1039960

- Fixed stainless steel sleeve

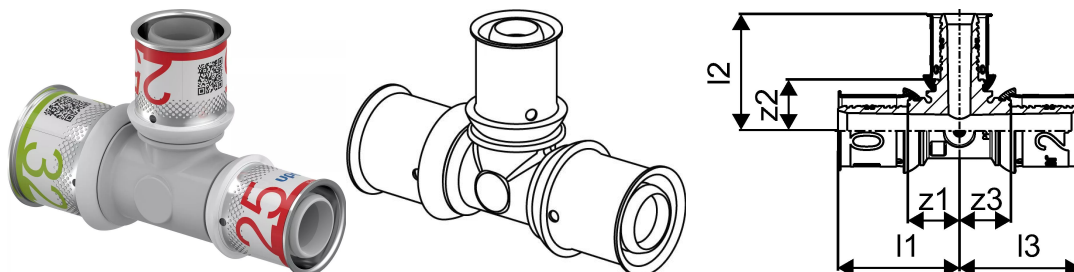

### About Uponor S-Press PLUS tee red. PPSU

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee red. PPSU 32-25-25

1039960

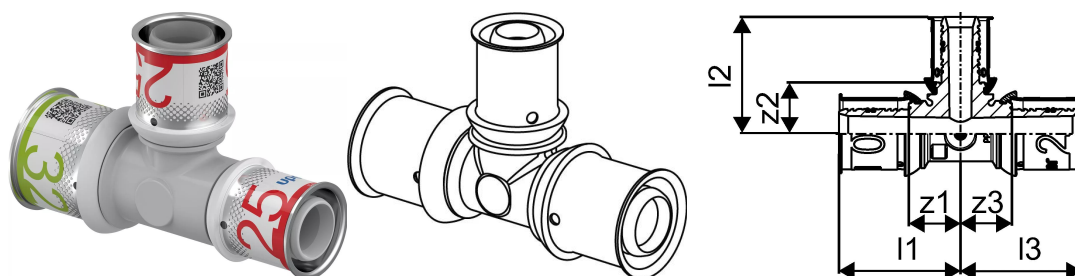

### Technical data

Item (unit of measurement) pce

Item no VVS 087442131

Item no LVI 1720717

Item no NRF 5114415

Length (I1) 51 mm

Length (I2) 51 mm

Length (I3) 51 mm

z2 23 mm

z3 23 mm

Packaging Quantity PL1 5

Packaging Quantity PL3 20

Packaging Quantity PL4 960

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)