


Uponor S-Press tee red. PPSU 40-20-40

1039962

- Fast installation with easy bevel and without calibration
- Colour code

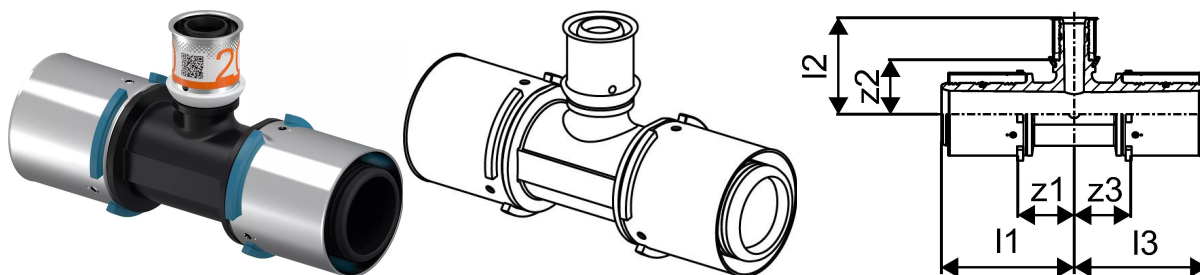

About Uponor S-Press tee red. PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee red. PPSU 40-20-40

1039962

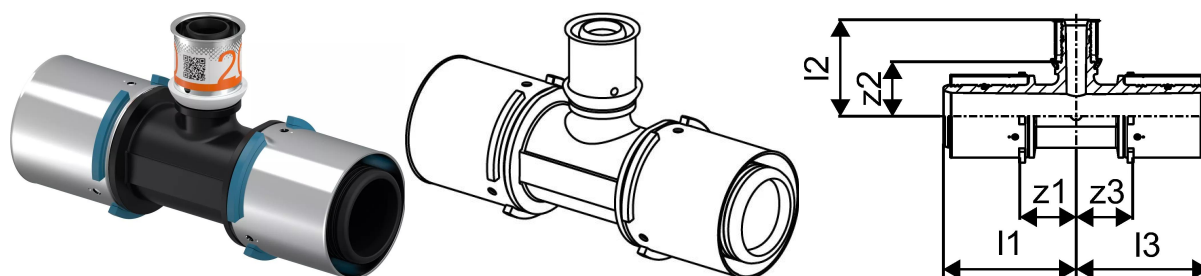

Technical data

Item (unit of measurement)	pce
Item no VVS	087442138
Item no LVI	1720719
Item no NRF	5114417
Length (l1)	68 mm
Length (l2)	49 mm
Length (l3)	68 mm
z2	28 mm
z3	29 mm
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb