


## Uponor S-Press tee red. PPSU 50-25-50

**1039968**

- Fast installation with easy bevel and without calibration
- Colour code

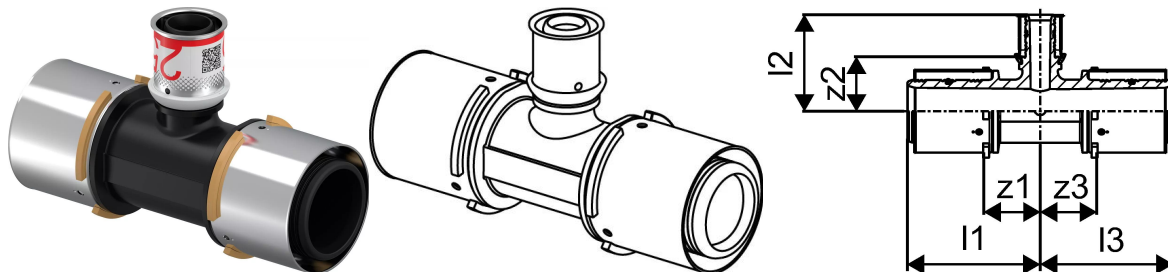

### About Uponor S-Press tee red. PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press tee red. PPSU 50-25-50

1039968

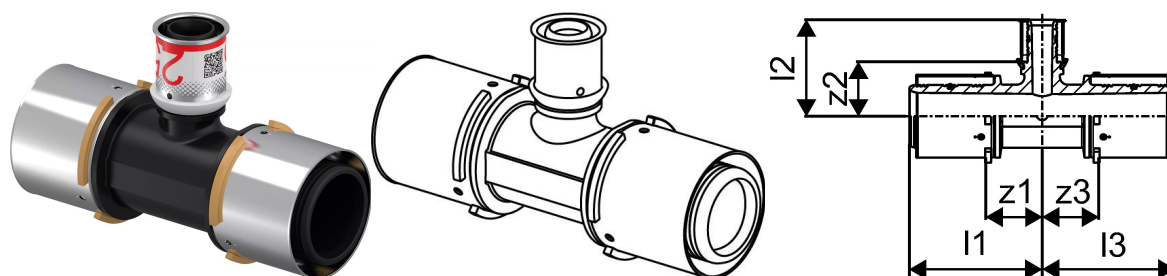

### Technical data

Item (unit of measurement)	pce
Item no VVS	087442148
Item no LVI	1720725
Item no NRF	5114424
Length (l1)	73 mm
Length (l2)	61 mm
Length (l3)	73 mm
z2	33 mm
z3	34 mm
Packaging Quantity PL1	3
Packaging Quantity PL4	432

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)